

ProtecTube


Pre-insulated ducting by Thermaflex®

Universal ducting as thermal and sound insulation as well as mechanical protection for a wide scope of applications



Benefits

- Universal protection of pipes, tubes and cables
- Excellent flexible
- Extremely lightweight
- Robust and stable in form due to corrugated casing pipe
- Outer casing resistant to UV radiation
- Environmentally friendly and fully recyclable Cradle to Cradle Certified™ Silver

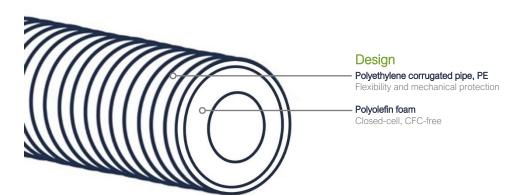

Applications

- Feed lines for heat pumps
- Empty piping system with thermal insulation
- Mechanical protection for pipes and cables

Technical Properties

Complete System	Insulation foam		
Fire classification	SBI Euroclass F according to EN13501	Polyolefin foam	
Service temperature range	-15°C to +90°C	Closed-cell structure, CFC-free	



Availability

Universal insulation duct							
Product code	Dimension	Outer casing OD [mm]	Insulation ID [mm]	Weight [kg/m]	min. bending radius [m]	max. length [m]	
1100-090000-000	90	90	40 - 45	0.57	0.30	500	
1100-125000-000	125	125	63 - 68	0.91	0.40	300	
1100-160000-000	160	160	90 - 95	1.41	0.60	150	
1100-200000-000	200	200	110 - 115	1.82	0.80	80	

- Wide selection of waterproof endcaps
- Jointing technology Full range of accessories







